
GSC3570 Open Door from Inside

Outdoor Indoor

Input PIN or Swipe Card at GDS37xx outside, after verification, GDS37xx notify GSC3570 over network, GSC3570 open door from inside





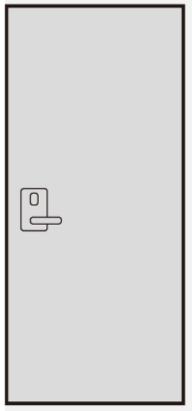



Video Intercom after doorbell pressed, GSC3570 virtual open door icon pressed to open door from inside

GSC3570 RTSP Video Monitor Switching During SIP Calls



- 1, Press RTSP icon during SIP call to view live video feed from IP Camera
- 2, Press GSC36xx or IP Camera icon to view full screen live video
- 3, Press "< " return icon, back to SIP call.



View snapshots stored in SD card via FTP











- •
- •
- •

etc.

GDS3710, GSC36xx IPC etc., snapshots of doorbell pressing, open door, motion detection, etc., alarm events.

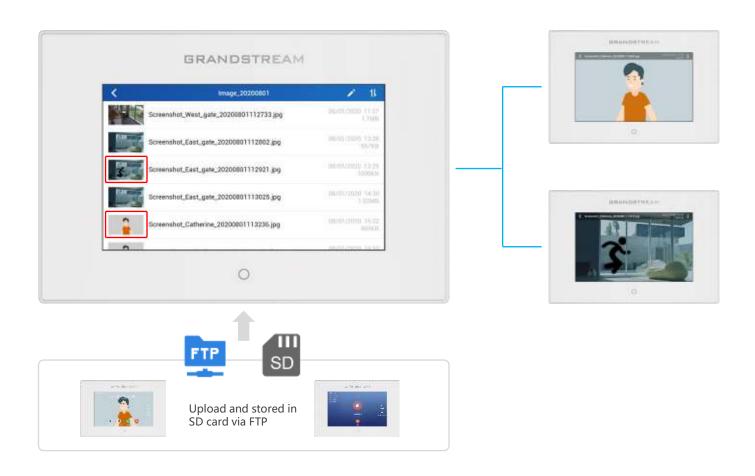

GSC3570 as Digital Doorbell

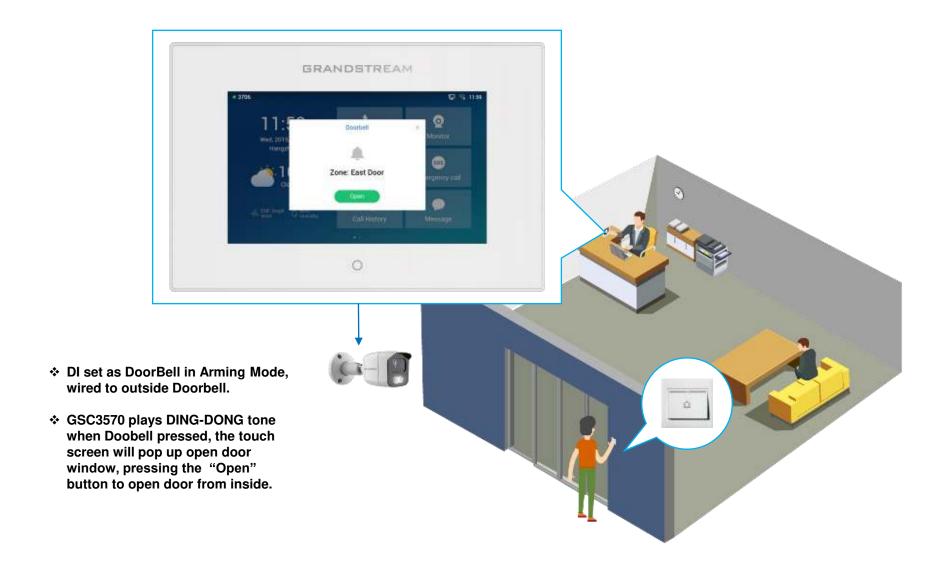


GSC3570 as **Door Opener**




DI Zone type set to Open Door in Zone settings, wired to open door switch.

GSC3570 DO wired to strike/eLock, pressing the open door switch will allow GSC3570 open door.


❖ Pop up/Toast will appear to remind open door even when SIP Call in session.

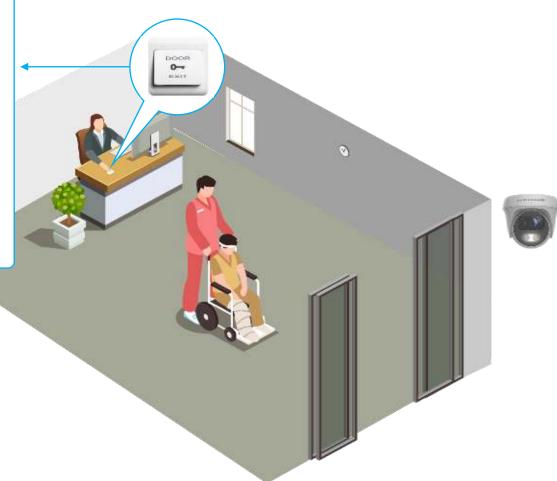

Remote Warehouse Management Scene

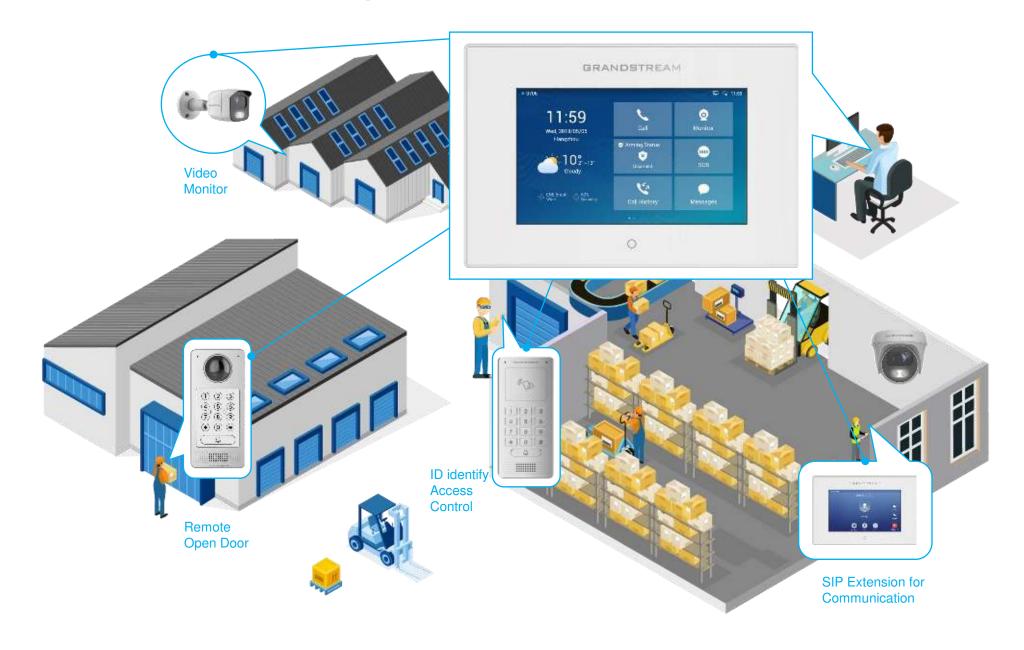

Green Energy Application Scene

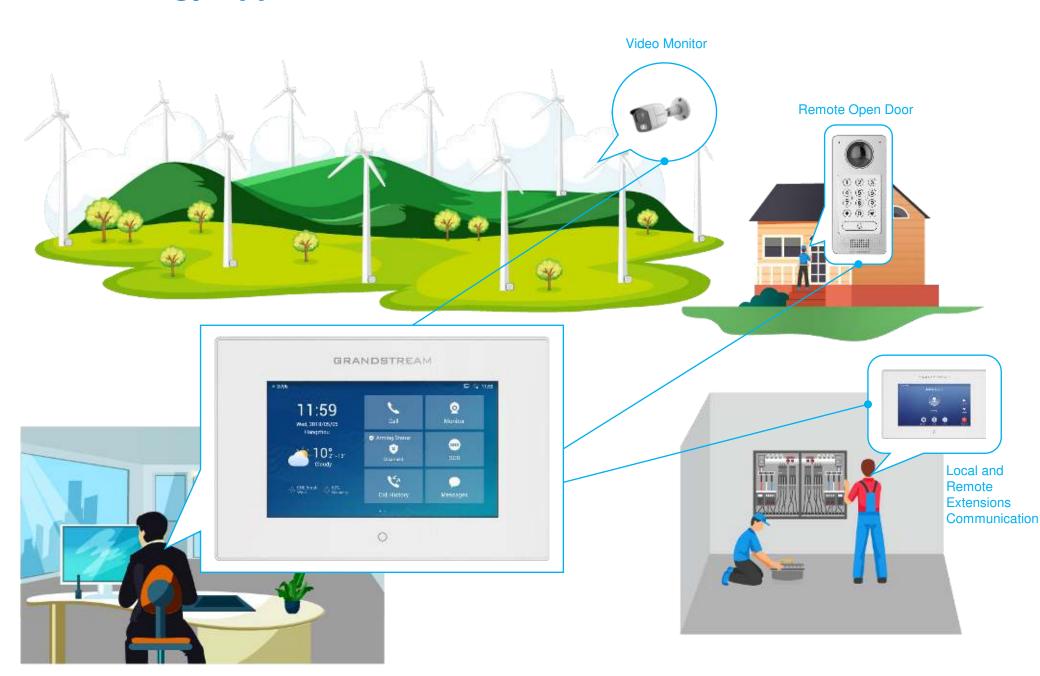

Safe Campus, Scenic Area or Visiting Center

→ One Key Alarm Call

Safety Station embedded with GDS3710, or GSC3510 with IP Cameras. Support One Key Alarm Call, Video Intercom, Motion Alarm, Snapshot Storage or Video Recording (additional NVR required)











Apartment or Community Application Scene



Villa Application Scene

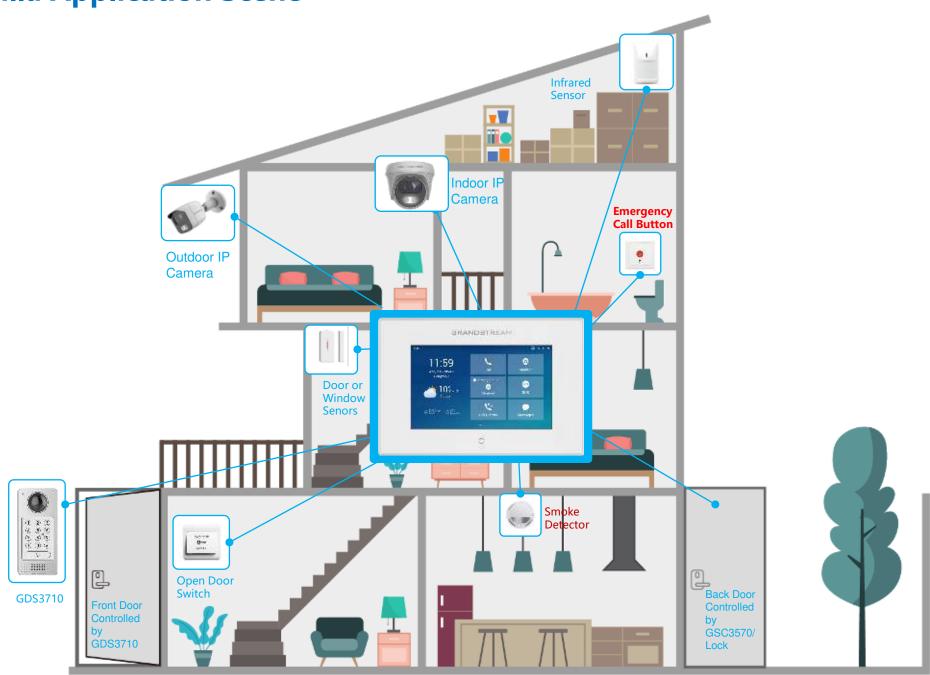

Hospital or Clinic Application Scene

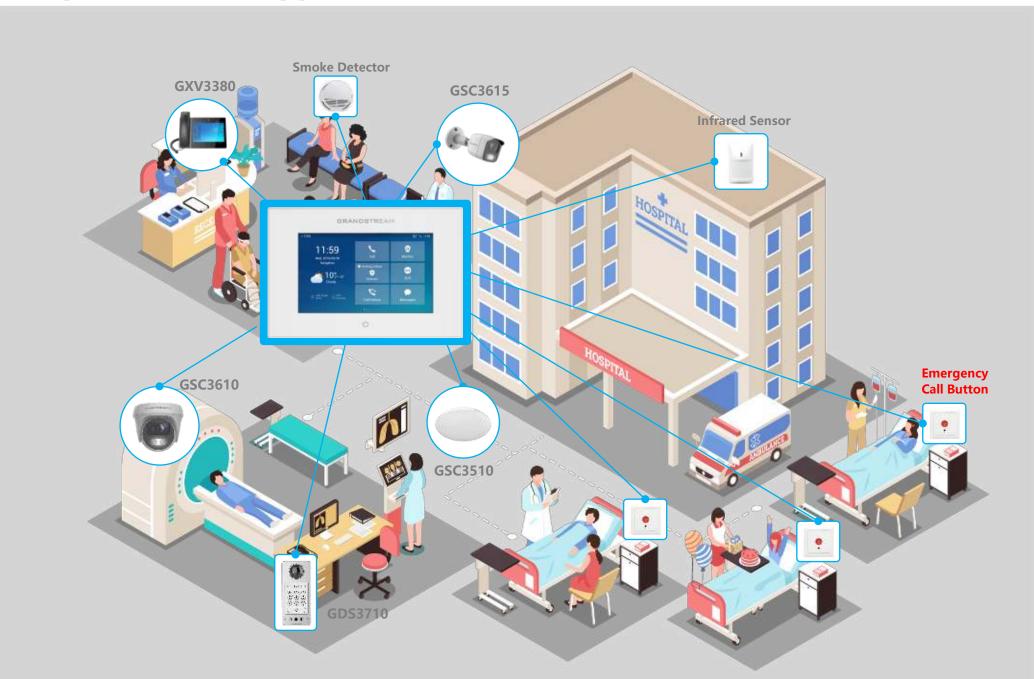


Safe Campus Application Scene



Grandstream Convergence Solution:

Device Connection Used (Ethernet)

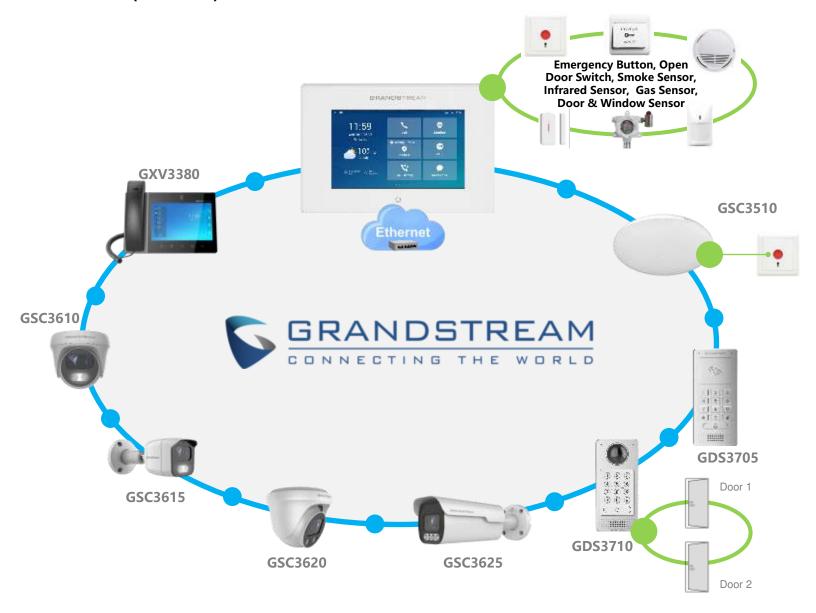

Grandstream Convergence Solution:

Device Connection Used (Wi-Fi)

