


Unified Threat Management

Compact
UTM
Device

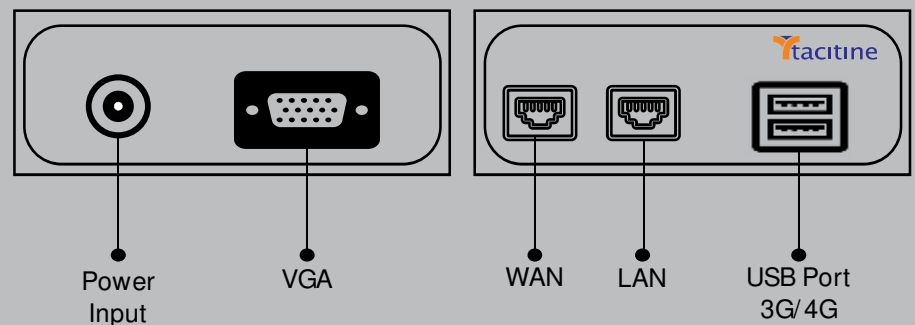

Defining
Cyber
Security
for
SOHO

Tacitine EN6200 RED Series designed for Small Office, Home Office, Branch Office and Medium Segment business to protect against Cyber threats.

RED Series UTM's provides complete security and hacker free network environment for any office coupled with Monitor, Manage and Control features at an affordable price.

In addition to UTM features, RED Series are equipped with AAA Hotspot functionalities for total user management on both wired and wireless network.

100% uptime is achieved in RED Series by 3G/4G dongle and hotspot.

RED Series UTM's are compact, fanless, more reliable, low power consumption and can be placed in office without any much special arrangement.

Specifications

Performance Parameters	EN6200 RED 25
Concurrent Sessions	2,275,000
New Sessions/sec	14000
Firewall Throughput(Mbps)	2150
Firewall IMIX(Mbps)	595
UTM Throughput(Mbps)	270
GAV Throughput(Mbps)	280
IPS Throughput (Mbps)	400
VPN Throughput(Mbps)	175
IPsec VPN Peers	Unlimited
Site to Site SSL VPN	2/200
IPv6 Ready	Yes
Firewall Policies	Unlimited
Inbound NAT connection	Unlimited
Local User Database	Unlimited
IP/Mac based filter rule*	Yes
MAC-IP-Interface binding	Yes
Licensed LAN Users	Unlimited
User Management AAA Hotspot	Yes
Hardware Specification	
Gigabit Ethernet Ports	1xLAN 1xWAN
RAM DDR3	2GB
Storage SSD	32GB
USB / VGA Port	2/1
Form Factor	Desktop
Dimensions (mm) - (HxWxD)	20x189x178
Weight (Kg)	1.2
Color	Grey
Power Supply	12V/3A
Input Voltage	100-240V/50-60Hz
Consumption	10W
Total Heat Dissipation (BTU)	110
Operating Temperature	0-45°C
Storage Temperature	2-70°C
Relative Humidity (NC)	10 to 90%
Regulatory Compliance	FCC Part 15, Class B, CE

All specification and photos are subject to change without prior notice.

1.Maximum throughput performance is measured under ideal test conditions using industry standard performance test tools. 2. Firewall UDP throughput performance is based on RFC 2544 guidelines. 3.All Performance values are upto or rough guideline only and vary depending on system configuration. 3. IPS throughput(http) measured using default IPS rule set and 512KB object size. 4.VPN throughput measured using multiple tunnels with 512KB response size. 5.Testing done with multiple flows through multiple port pairs. * If all slots populated.

Ordering Information

EN6200- RED-25-H-Y	2 Port device includes AV/CF/AS/IDS/IPS/AAA/HW Warranty subscription upto 30 concurrent users with "H" Variant and "Y" Support.
H = Hotspot Variants Options: Default Hotspot(DHS), Office Hotspot (OHS), Hospitality Hotspot (HHS), Educational Hotspot(EHS).	
Y = Subscription years options : 1 Year or 3 Years	

Tacitine Assured Support

Tacitine products come with direct OEM 24/7 support by trained Professionals for product configuration and support. TAs helps customer on security best practices to make the network hacker free and more reliable.



www.tacitine.com

Features

- Router
- Multi LAN/WAN connection
- Scalable Users
- Auto Load Balancer
- Auto Fail Over
- SPI Firewall
- Geo IP Filter
- Web Security
- Content Filter
- Email Security
- Gateway Level Antivirus
- Intrusion Prevention System
- Intrusion Detection System
- AAA User Management
- VPN - SSL/IPSec
- Quality of Service
- DDNS/SNMP/Remote sys log
- Traffic Analyzer
- Inbuilt Logs & Reports

Tacitine Consulting Pvt Ltd,
6/1, 1st Main,
Behind Kodava Samaj, Vasanth Nagar,
Bangalore – 560 052.
India | USA | Middle East | South East Asia